Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

23 April 2018

Significant New Gold Discovery 7km South of Abujar

- **Step back drilling extends Abujar Main deposit to over 260 metres in vertical depth**
- **First geochem results at Abujar South confirm a 15km and up to 4km wide extension of the gold bearing Abujar Main Structure**

HIGHLIGHTS

- **Second step back DD hole confirms substantial depth extension of Abujar Main deposit. Hole ZRD113A has returned 6m @3.4 g/t Au from 274m including 1m @7.75g/t Au. ZRD113A demonstrates that resources at Abujar Main may be extended from the current average vertical depth of between 120 metres and 170 metres to up to 300 metres in vertical depth**
- **New discovery south of the Pischon prospect, 7km south of Abujar Main. The Pischon prospect now extends to 2.5km strike length defined by very shallow scout drilling of 50m to 90m holes at angles of 50-55° from horizontal. Shallow drilling has resulted in a gold discovery approximately 1,000 metres south of the existing Pischon resource. The discovery should permit strong growth in resources in an area with a strike length which is now comparable to the Abujar Main deposit. These very shallow results include:**
    - **4m @ 3.8g/t Au, 8m @ 2.04 g/t Au and 12 m@ 1.31 g/t Au at Pischon South with hole depths of 50m at 50° from horizontal.**
    - **12m @ 1.0g/t Au at Pischon North,**
- **New 15km long and up to 4km wide gold mineralisation corridor identified on Abujar South tenement – an extension of the gold bearing shear structure on the Abujar Middle tenement**
- **Assay results are pending for more step back holes for Abujar Main and all holes for the Mandanou, Golikro and Zoukpangbeu North prospects**
- **First 2018 drilling campaign on the middle tenement of the Abujar gold project completed with 60 holes drilled for a total of 6441m in RC and DD**

Tietto Managing Director Dr Caigen Wang commented:

"Confirmation of the depth extension of the Abujar Main deposit is an important step in upgrading the existing resource at Abujar Main from an average vertical depth of between 120m and 170m to up to 300m in vertical depth, or up to a 76% increase in the vertical depth of the resource.

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

"The discovery in the south at Pischon now gives Pischon a strike length which is comparable to the Abujar Main deposit and provides multiple targets for drilling in mid-2018.

"Drilling results from Pischon South which were designed on the basis of soil geochem and pitting results gives us substantial encouragement for the upcoming assay results for shallow RC holes drilled at Mandanou, Golikro and the Zoukpangbeu North prospect, where similar soil geochem and pitting results were present.

"The extensive and strong 15km long and up to 4km wide soil geochem anomaly on the Abujar South tenement which Tietto has reported in this media and ASX release are the first exploration results from this tenement which Tietto will now begin to intensively explore."

Dr Wang added:

"We are very excited about the sheer number of potential large scale gold mineralisation targets in the Abujar Project Area pipeline."

West African gold developer and explorer Tietto Minerals Limited (ASX: TIE) (**Tietto** or the **Company**) is pleased to announce that it has successfully completed its 2018 first drilling campaign in the middle tenement of the three tenements comprising the Abujar gold project in Côte d'Ivoire. A total of 60 holes were drilled in RC (reverse circulation) or RC with DD (diamond drill) tail for 6,441.3m including 5,394.4m RC and 1,046.9m DD.

The aim of this drilling campaign was to test the depth extension of existing JORC compliant resources and a number of newly defined mineralisation targets in preparation for the next resource definition drilling to be carried out in the 2nd quarter of 2018. As shown in the **Figure 1** below, the following six targets were test drilled.

- Abujar Main deposit – depth extension
- Abujar Main – northern extension
- Mandanou
- Pischon deposit – depth extension, northern and southern extension
- Golikro
- Zoukpangbeu North

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

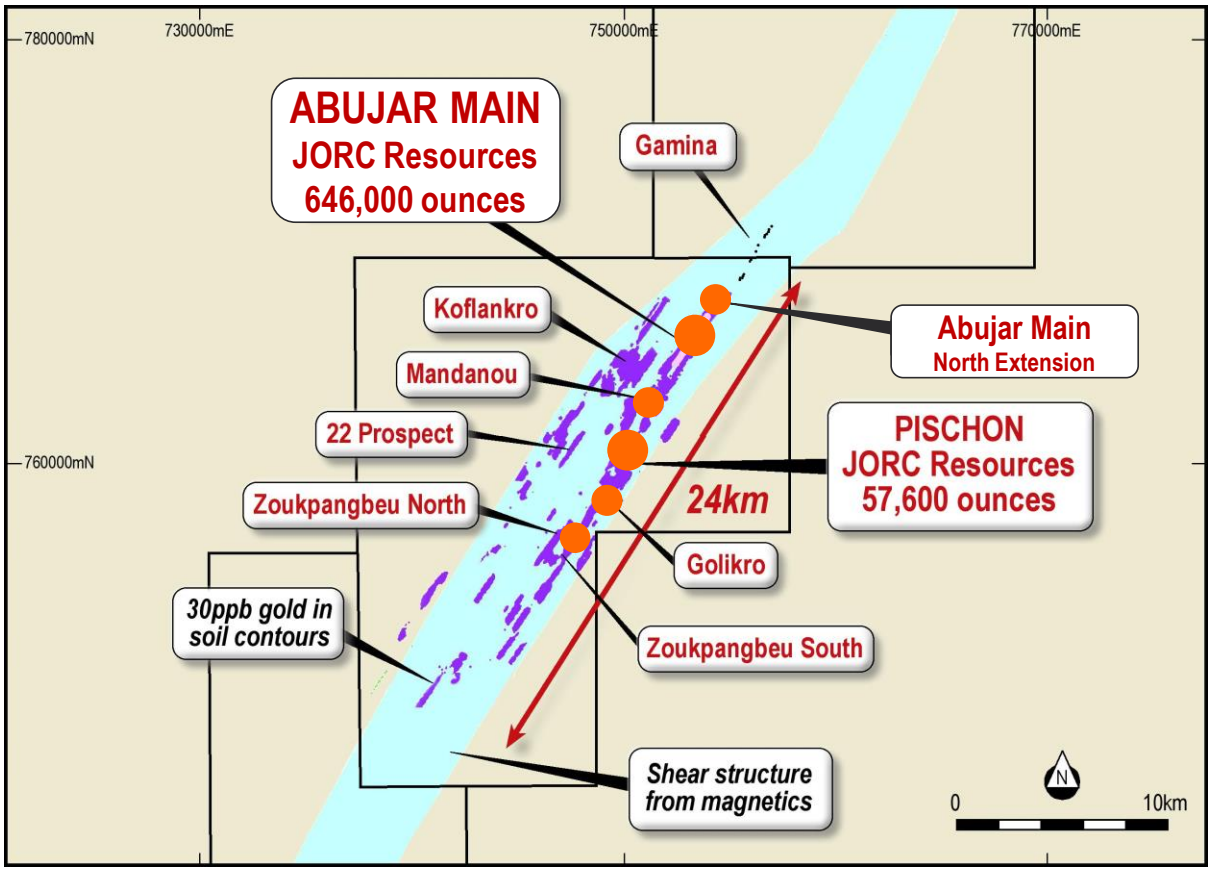

Figure 1: Plan view of the first drilling targets of the 2018 first drilling campaign

1. 2nd step back hole confirms Abujar Main deposit extends to depth

Assay results for the 2nd step back RC/DD hole ZRD113A drilled on Line 24 during the first 2018 drilling campaign confirms gold mineralisation extends to 260m vertical depth and beyond. As shown in Figure 2, better results include:

- 6.23m @ 1.3g/t Au from 254m including **1.23m @ 5.04 g/t** Au from 259m
- **6m @ 3.4g/t Au** from 274m including **1.0m @ 7.8 g/t** Au from 274m (vertical 250m deep)
- **1m @ 5.3 g/t** Au from 288m
  (Assays from 260m to 263m are pending)

As reported on the 27th March 2018, the 1st step back hole ZRD104 on Line 19, 500 m south of Line 24 intercepted the following gold mineralisation:

- **13m @ 2.8g/t Au** from 238m to EOH including **3m @ 2.76g/t Au** from 238m and **5m @ 5.48g/t Au** from 246m
- EOH in mineralisation

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

Five more step back holes drilled to test depth extensions of the Abujar Main deposit have yet to receive assay results due to Tietto experiencing assay lab sample congestion in reporting DD core assays.

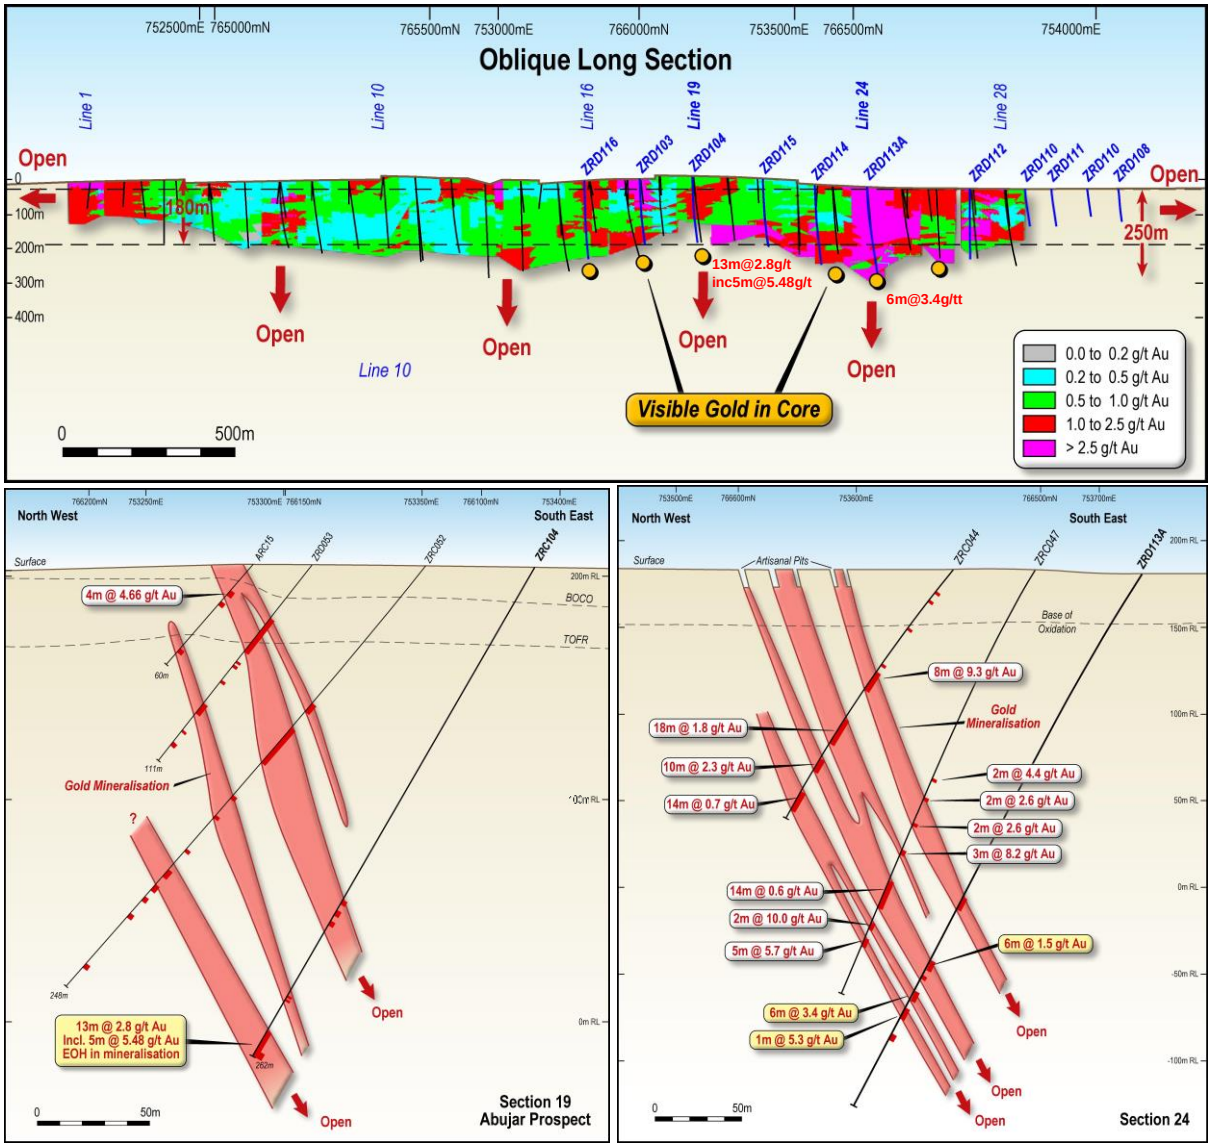

Figure 2: Oblique Long Section and Cross Section views of Abujar Main deposit and depth extension

2. Significant gold discovery on both Pischon south and north extension

Shallow test holes drilled in the oxidized zone of the south and north extension of Pischon deposit revealed extensive near surface gold mineralisation over a strike length of 2.5km, particularly over a 1km strike length of Pischon South extension.

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

14 RC holes on 5 lines were drilled for Pischon South. The 5 lines are 200m apart. Each line has 2~3 shallow RC holes of 50m deep at 50° from horizontal. All assay results received are reported in this announcement.

6 RC holes on 4 lines were drilled for Pischon North. The 4 lines are 200m apart. Each line has 1~2 shallow RC holes of 80~120m deep at 50° from horizontal. All results received and reported in this announcement.

Only one step back hole was drilled on Pischon Central for 102m RC plus 77.74m DD tail. Results are pending.

As shown Figure 3, near surface RC drilling intercepts are highlighted below. Figure 4 and Figure 5 present some section views in Pischon South and Pischon Central.

Pischon South:

- **ZRC 132: 14m @1.29g/t Au from 18m inc 4m @ 3.8g/t Au from 20m, 4m @ 1.29g/t Au from 46m ending in mineralisation**
- **ZRC134: 20m @ 1.01g/t Au from 20m inc 8m @ 2.04 g/t Au from 20m**
- **ZRC140: 12 m@ 1.31 g/t Au from 32m**

Pischon Middle:

- **ZRC085: 28m @ 2.00 g/t Au from 24m inc 6m @ 6.85 Au from 42m, 6m @ 1.28g/t Au from 86m ending in mineralisation**
- **ZRC086: 12m @ 2.25 g/t Au from 30m inc 2m @ 10.65 from 40m**

Pischon North:

- **ZRC123: 12m @ 1.0g/t Au from 50m inc 4m @1.9g/t Au from 58m.**

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

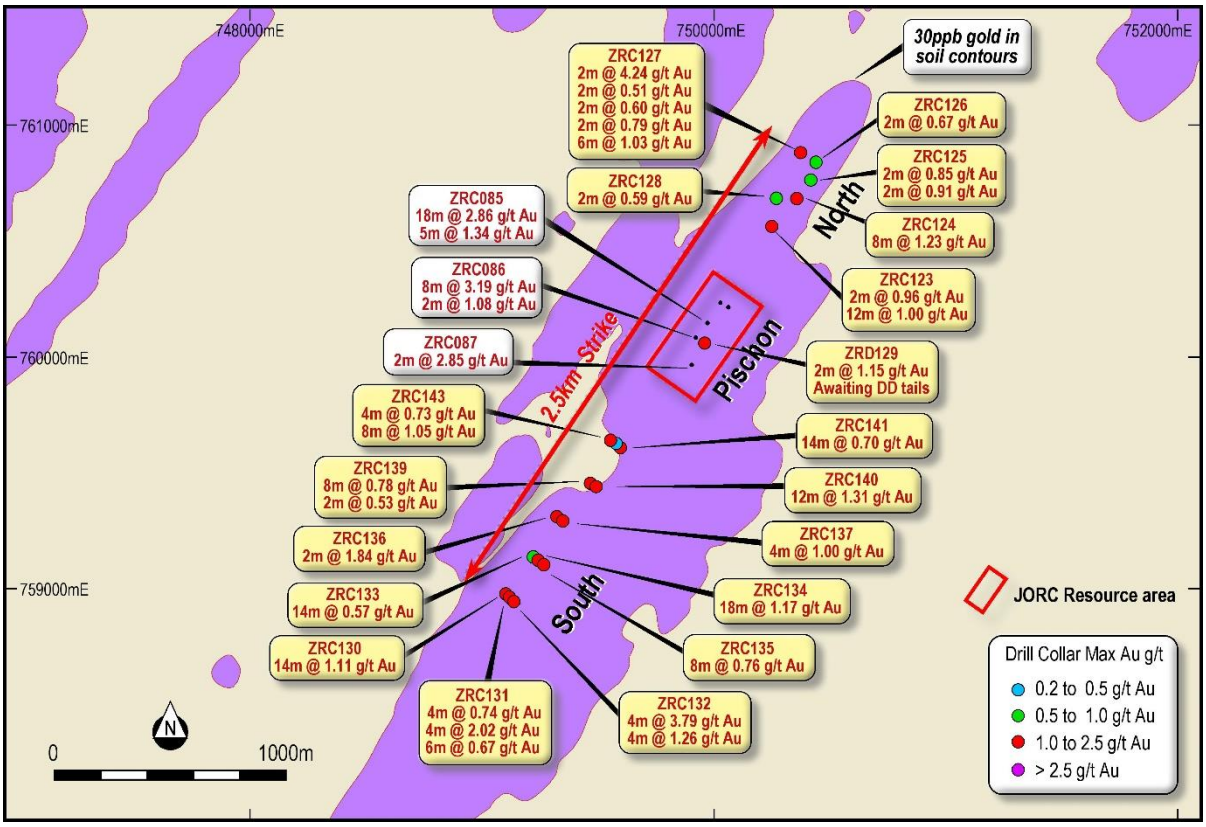

Figure 3: Plan view of Pischon mineralisation and its north and south extension

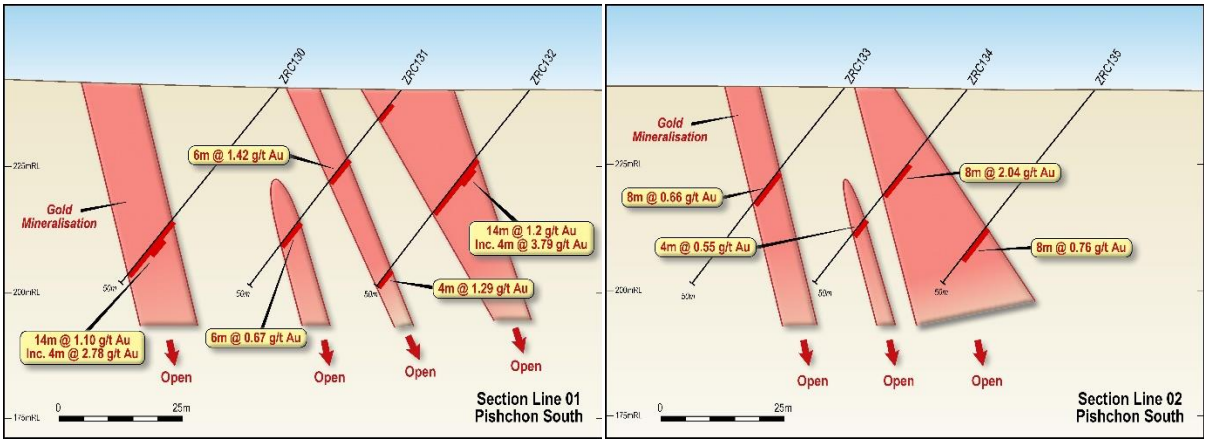

Figure 4: Section views of Pischon South Target

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

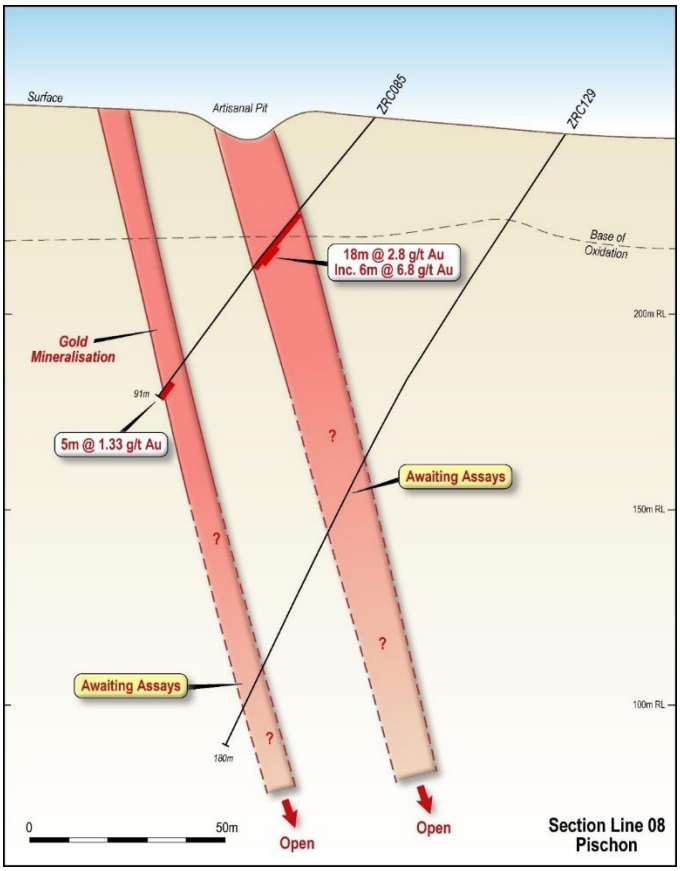

Figure 5: Section view of Pischon target awaiting assay results

3. New 15km gold mineralisation corridor identified on Abujar South tenement

An initial soil geochem program was completed on the Abujar South tenement (also named the "Issia" tenement) within an 18.4km structural extension of the gold mineralisation corridor that was revealed and proved through geochem and drilling on the Abujar Middle tenement. A total of 2,863 soil samples were taken on 46 sampling lines with a line spacing of 400m and sampling spacing of 50m.

Assay results show that of the 2,863 soil samples taken, 120 samples have reported gold results above 25ppb including 55 samples reporting above 50ppb which accounts for 19.2% in the total samples taken and assayed.

The nature of the gold in soil anomaly in the Abujar South tenement, while being compared with the signature of gold in soil anomaly in the Abujar Middle tenement (Figure 6), gives an additional gold mineralisation target with combined strike lengths over 15km.

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

The strong gold anomaly in soil in the Abujar South tenement warrants an infill soil geochem campaign to further define the gold mineralisation targets for follow up drilling. This campaign has now commenced.

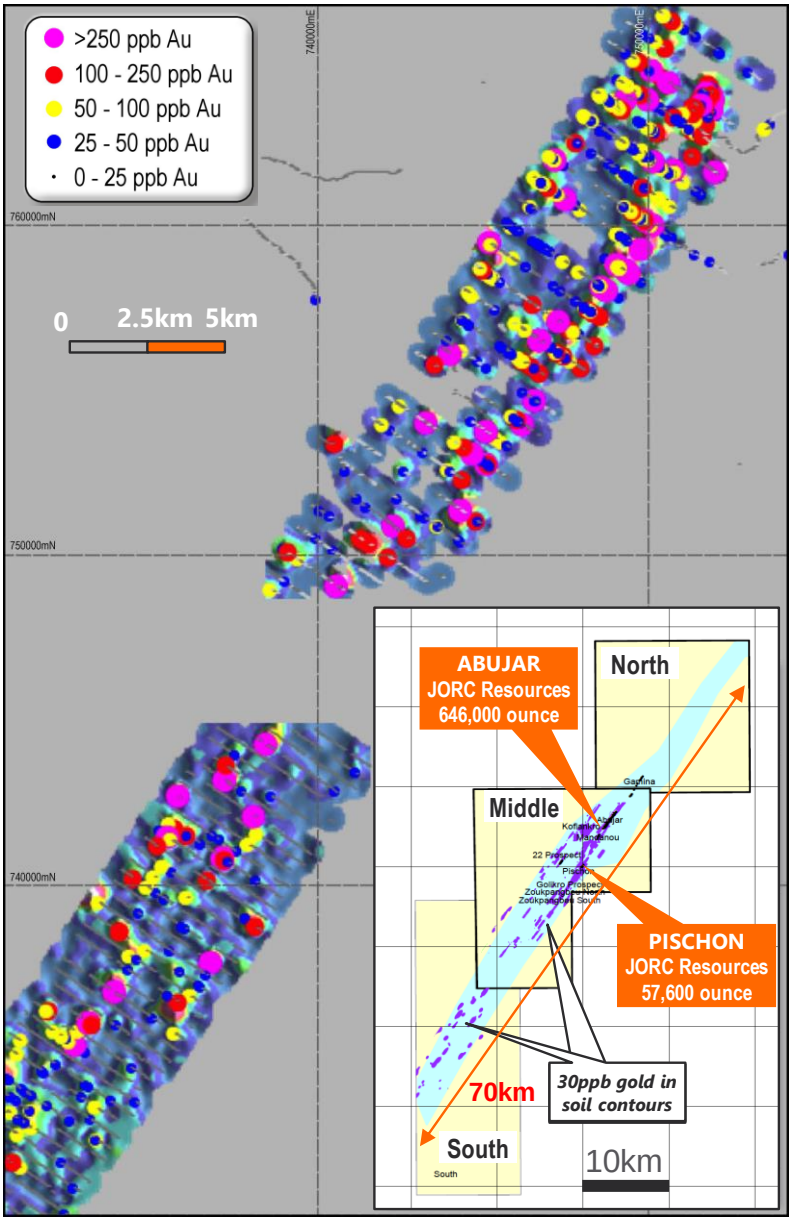

Figure 6: Issia initial soil results and regional geochem results of the Abujar Middle tenement

ENDS

For further information, visit www.tietto.com or contact:

Dr Caigen Wang
Managing Director
Tel: +61 8 9486 4036

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

Competent Persons' Statements

The information in this report that relates to Exploration Targets and Exploration Results is based on information compiled by Mr Mark Strizek, a Competent Person who is a Member or The Australasian Institute of Mining and Metallurgy. Mr Strizek is a non-executive director of the Company. Mr Strizek has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaking to qualify as a Competent Person as defined in the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Strizek consents to the inclusion in the announcement of the matters based on his information in the form and context in which it appears.

The information in this report that relates to Mineral Resources was first published by RPM Global in the Company's Replacement Prospectus dated 16 November 2017 released on the ASX platform on 16 January 2018. The Company confirms that it is not aware of any new information or data that materially affects the relating to Minerals Resources in this publication. The Company confirms that all material assumptions and technical parameters underpinning the estimates in continue to apply and have not materially changed. The Company confirms that the form and context in which the RPM Global's findings are presented have not been materially modified.

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

Table 1: RC and DD hole locations, type and depth

Prospect	Hole ID	Easting	Northing	RL	DIP	Azimuth	Hole Length	Hole Type	RC Depth from	RC Depth to	DD Depth from	DD Depth to
Abujar Main	ZRD113A	753723	766471	220	-65	315	350.13	RC	0	122	122	350.13
Pischon	ZRC085	749916	760091	250	-50	304	91	RC	0	91		
Pischon	ZRC086	749859	759998	255	-50	304	79	RC	0	79		
Pischon	ZRD129	749956	760064	246	-60	304	179.74	RC/DD	0	102	102	179.74
Pischon North	ZRC123	750251	760565	220	-55	304	120	RC	0	120		
Pischon North	ZRC124	750355	760684	239	-55	304	108	RC	0	108		
Pischon North	ZRC125	750413	760769	230	-55	315	120	RC	0	120		
Pischon North	ZRC126	750438	760849	227	-55	304	114	RC	0	114		
Pischon North	ZRC127	750375	760888	222	-50	124	80	RC	0	80		
Pischon North	ZRC128	750260	760688	220	-50	124	80	RC	0	80		
Pischon South	ZRC143	749552	759642	240	-50	304	50	RC	0	50		
Pischon South	ZRC142	749572	759629	240	-50	304	50	RC	0	50		
Pischon South	ZRC141	749593	759614	240	-50	304	50	RC	0	50		
Pischon South	ZRC138	749440	759476	240	-50	304	50	RC	0	50		
Pischon South	ZRC139	749460	759463	240	-50	304	50	RC	0	50		
Pischon South	ZRC140	749481	759448	240	-50	304	50	RC	0	50		
Pischon South	ZRC136	749328	759311	240	-50	304	50	RC	0	50		
Pischon South	ZRC137	749349	759297	240	-50	304	50	RC	0	50		
Pischon South	ZRC133	749216	759145	240	-50	304	50	RC	0	50		
Pischon South	ZRC134	749237	759131	240	-50	304	50	RC	0	50		
Pischon South	ZRC135	749258	759117	240	-50	304	50	RC	0	50		
Pischon South	ZRC130	749104	758979	240	-50	304	50	RC	0	50		
Pischon South	ZRC131	749125	758965	240	-50	304	50	RC	0	50		
Pischon South	ZRC132	749146	758951	240	-50	304	50	RC	0	50		

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

Table 2: All DD assay results for ZRD113A with ≥0.10g/t Au

Hole_ID	From	To	Interval	Gold (g/t)
ZRD113A	122	123	1	0.79
ZRD113A	161	162	1	0.19
ZRD113A	183	184	1	0.1
ZRD113A	194	195	1	0.12
ZRD113A	196	197	1	0.16
ZRD113A	199	200	1	0.16
ZRD113A	202	203.37	1.37	0.13
ZRD113A	203.37	204	0.63	0.1
ZRD113A	205	206	1	0.11
ZRD113A	206.9	208	1.1	0.22
ZRD113A	208	209	1	0.1
ZRD113A	210.33	211	0.67	0.11
ZRD113A	211	212	1	0.12
ZRD113A	212	213	1	0.16
ZRD113A	213	214.5	1.5	0.69
ZRD113A	216	217	1	0.57
ZRD113A	217	218	1	0.52
ZRD113A	219	220	1	0.46
ZRD113A	220	221	1	0.26
ZRD113A	226	227.5	1.5	0.13
ZRD113A	234	235	1	0.15
ZRD113A	235	236	1	0.1
ZRD113A	238	239	1	0.33
ZRD113A	241	242	1	0.11
ZRD113A	246	247	1	0.4
ZRD113A	247	248	1	0.12
ZRD113A	250.5	252	1.5	0.32
ZRD113A	252	253	1	0.14
ZRD113A	253	254	1	0.11
ZRD113A	254	255	1	0.82
ZRD113A	255	256	1	0.77
ZRD113A	256	257	1	0.26
ZRD113A	257	258	1	0.81
ZRD113A	258	259	1	0.13
ZRD113A	259	260.23	1.23	5.04
ZRD113A	***260.23***	***261***	***0.77***	***Pending***
ZRD113A	***261***	***262***	***1***	***Pending***
ZRD113A	***262***	***263.26***	***1.26***	***Pending***
ZRD113A	263.26	264	0.74	0.14

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

Hole_ID	From	To	Interval	Gold (g/t)
ZRD113A	264	265	1	1.14
ZRD113A	265	266	1	0.33
ZRD113A	266	267	1	0.16
ZRD113A	268	269	1	0.14
ZRD113A	269	270	1	0.49
ZRD113A	274	275	1	7.75
ZRD113A	275	276	1	1.14
ZRD113A	276	277	1	3.6
ZRD113A	277	278	1	2.32
ZRD113A	278	279	1	1.24
ZRD113A	279	280	1	4.14
ZRD113A	282	283	1	0.18
ZRD113A	284	285	1	0.13
ZRD113A	285	286	1	0.2
ZRD113A	286	287	1	0.23
ZRD113A	287	288	1	0.22
ZRD113A	288	289	1	5.29
ZRD113A	289	290	1	0.41
ZRD113A	290	291	1	0.3
ZRD113A	291	292	1	0.34
ZRD113A	292	293	1	0.13
ZRD113A	296	297	1	0.25
ZRD113A	297	298	1	0.11
ZRD113A	302	303	1	0.78
ZRD113A	303	304	1	0.21
ZRD113A	304	305	1	0.42
ZRD113A	305	306	1	0.2
ZRD113A	311	312	1	0.18
ZRD113A	312	313	1	0.11
ZRD113A	327	328	1	0.16

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

Table 3: All RC assay results ≥0.10g/t Au

Hole_ID	From	To	Interval	Gold (g/t)
ZRC123	0	2	2	0.21
ZRC123	14	16	2	0.96
ZRC123	28	30	2	0.17
ZRC123	34	36	2	0.1
ZRC123	44	46	2	0.14
ZRC123	46	48	2	0.12
ZRC123	48	50	2	0.28
ZRC123	50	52	2	0.92
ZRC123	52	54	2	1.05
ZRC123	54	56	2	0.1
ZRC123	56	58	2	0.15
ZRC123	58	60	2	1.17
ZRC123	60	62	2	2.63
ZRC123	62	64	2	0.12
ZRC123	70	72	2	0.15
ZRC123	84	86	2	0.11
ZRC123	92	94	2	0.23
ZRC123	96	98	2	0.14
ZRC123	98	100	2	0.1
ZRC123	110	112	2	0.16
ZRC123	112	114	2	0.22
ZRC123	114	116	2	0.16
ZRC123	116	118	2	0.15
ZRC124	0	2	2	0.12
ZRC124	54	56	2	0.16
ZRC124	76	78	2	0.18
ZRC124	78	80	2	0.11
ZRC124	90	92	2	4.23
ZRC124	92	94	2	0.13
ZRC124	96	98	2	0.52
ZRC124	102	104	2	0.13
ZRC124	106	108	2	0.31
ZRC125	20	22	2	0.13
ZRC125	22	24	2	0.13
ZRC125	38	40	2	0.85
ZRC125	66	68	2	0.21
ZRC125	68	70	2	0.43
ZRC125	76	78	2	0.17
ZRC125	82	84	2	0.91
ZRC125	88	90	2	0.14

Hole_ID	From	To	Interval	Gold (g/t)
ZRC125	88	90	2	0.14
ZRC125	90	92	2	0.18
ZRC125	94	96	2	0.11
ZRC125	100	102	2	0.19
ZRC125	102	104	2	0.27
ZRC125	104	106	2	0.25
ZRC125	106	108	2	0.14
ZRC126	0	2	2	0.14
ZRC126	2	4	2	0.14
ZRC126	4	6	2	0.23
ZRC126	18	20	2	0.12
ZRC126	38	40	2	0.17
ZRC126	58	60	2	0.1
ZRC126	60	62	2	0.11
ZRC126	64	66	2	0.38
ZRC126	66	68	2	0.22
ZRC126	68	70	2	0.67
ZRC126	70	72	2	0.44
ZRC126	72	74	2	0.27
ZRC126	74	76	2	0.14
ZRC126	76	78	2	0.2
ZRC126	88	90	2	0.16
ZRC126	102	104	2	0.16
ZRC126	104	106	2	0.13
ZRC127	2	4	2	0.11
ZRC127	4	6	2	0.17
ZRC127	6	8	2	4.24
ZRC127	20	22	2	0.15
ZRC127	22	24	2	0.22
ZRC127	24	26	2	0.23
ZRC127	26	28	2	0.1
ZRC127	28	30	2	0.14
ZRC127	30	32	2	0.24
ZRC127	32	34	2	0.12
ZRC127	34	36	2	0.15
ZRC127	40	42	2	0.17
ZRC127	42	44	2	0.51
ZRC127	46	48	2	0.34
ZRC127	50	52	2	0.6
ZRC127	52	54	2	0.13

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

Hole_ID	From	To	Interval	Gold (g/t)
ZRC127	54	56	2	0.48
ZRC127	56	58	2	0.13
ZRC127	58	60	2	0.79
ZRC127	60	62	2	0.19
ZRC127	66	68	2	0.13
ZRC127	68	70	2	0.12
ZRC127	70	72	2	1.2
ZRC127	72	74	2	1.22
ZRC127	74	76	2	0.67
ZRC127	76	78	2	0.17
ZRC127	78	80	2	0.21
ZRC128	14	16	2	0.26
ZRC128	24	26	2	0.16
ZRC128	26	28	2	0.16
ZRC128	28	30	2	0.36
ZRC128	30	32	2	0.3
ZRC128	34	36	2	0.12
ZRC128	36	38	2	0.36
ZRC128	38	40	2	0.16
ZRC128	40	42	2	0.13
ZRC128	44	46	2	0.12
ZRC128	46	48	2	0.19
ZRC128	48	50	2	0.16
ZRC128	50	52	2	0.59
ZRC128	54	56	2	0.12
ZRC128	64	66	2	0.11
ZRC128	70	72	2	0.18
ZRD129	3	4	1	0.19
ZRD129	30	32	2	0.42
ZRD129	32	34	2	0.13
ZRD129	84	86	2	1.15
ZRC130	0	2	2	0.23
ZRC130	2	4	2	0.34
ZRC130	4	6	2	0.3
ZRC130	6	8	2	0.16
ZRC130	8	10	2	0.13
ZRC130	16	18	2	0.13
ZRC130	22	24	2	0.11
ZRC130	26	28	2	0.24
ZRC130	30	32	2	0.45

Hole_ID	From	To	Interval	Gold (g/t)
ZRC130	34	36	2	0.52
ZRC130	36	38	2	0.14
ZRC130	38	40	2	1.99
ZRC130	40	42	2	3.58
ZRC130	42	44	2	0.16
ZRC130	44	46	2	0.17
ZRC130	46	48	2	1.19
ZRC130	48	50	2	0.1
ZRC131	0	2	2	0.28
ZRC131	2	4	2	0.4
ZRC131	4	6	2	0.77
ZRC131	6	8	2	0.71
ZRC131	8	10	2	0.28
ZRC131	10	12	2	0.19
ZRC131	12	14	2	0.24
ZRC131	14	16	2	0.13
ZRC131	16	18	2	0.12
ZRC131	18	20	2	0.7
ZRC131	20	22	2	3.33
ZRC131	22	24	2	0.23
ZRC131	24	26	2	0.14
ZRC131	30	32	2	0.15
ZRC131	34	36	2	1.19
ZRC131	36	38	2	0.23
ZRC131	38	40	2	0.6
ZRC131	40	42	2	0.48
ZRC131	42	44	2	0.21
ZRC131	44	46	2	0.36
ZRC131	46	48	2	0.2
ZRC132	0	2	2	0.21
ZRC132	2	4	2	0.24
ZRC132	4	6	2	0.22
ZRC132	6	8	2	0.41
ZRC132	8	10	2	0.22
ZRC132	10	12	2	0.22
ZRC132	12	14	2	0.16
ZRC132	14	16	2	0.19
ZRC132	16	18	2	0.18
ZRC132	18	20	2	0.43
ZRC132	20	22	2	3.85

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

Hole_ID	From	To	Interval	Gold (g/t)
ZRC127	54	56	2	0.48
ZRC127	56	58	2	0.13
ZRC127	58	60	2	0.79
ZRC127	60	62	2	0.19
ZRC127	66	68	2	0.13
ZRC127	68	70	2	0.12
ZRC127	70	72	2	1.2
ZRC127	72	74	2	1.22
ZRC127	74	76	2	0.67
ZRC127	76	78	2	0.17
ZRC127	78	80	2	0.21
ZRC128	14	16	2	0.26
ZRC128	24	26	2	0.16
ZRC128	26	28	2	0.16
ZRC128	28	30	2	0.36
ZRC128	30	32	2	0.3
ZRC128	34	36	2	0.12
ZRC128	36	38	2	0.36
ZRC128	38	40	2	0.16
ZRC128	40	42	2	0.13
ZRC128	44	46	2	0.12
ZRC128	46	48	2	0.19
ZRC128	48	50	2	0.16
ZRC128	50	52	2	0.59
ZRC128	54	56	2	0.12
ZRC128	64	66	2	0.11
ZRC128	70	72	2	0.18
ZRD129	3	4	1	0.19
ZRD129	30	32	2	0.42
ZRD129	32	34	2	0.13
ZRD129	84	86	2	1.15
ZRC130	0	2	2	0.23
ZRC130	2	4	2	0.34
ZRC130	4	6	2	0.3
ZRC130	6	8	2	0.16
ZRC130	8	10	2	0.13
ZRC130	16	18	2	0.13
ZRC130	22	24	2	0.11
ZRC130	26	28	2	0.24
ZRC130	30	32	2	0.45
ZRC130	34	36	2	0.52
ZRC130	36	38	2	0.14

Hole_ID	From	To	Interval	Gold (g/t)
ZRC130	38	40	2	1.99
ZRC130	40	42	2	3.58
ZRC130	42	44	2	0.16
ZRC130	44	46	2	0.17
ZRC130	46	48	2	1.19
ZRC130	48	50	2	0.1
ZRC131	0	2	2	0.28
ZRC131	2	4	2	0.4
ZRC131	4	6	2	0.77
ZRC131	6	8	2	0.71
ZRC131	8	10	2	0.28
ZRC131	10	12	2	0.19
ZRC131	12	14	2	0.24
ZRC131	14	16	2	0.13
ZRC131	16	18	2	0.12
ZRC131	18	20	2	0.7
ZRC131	20	22	2	3.33
ZRC131	22	24	2	0.23
ZRC131	24	26	2	0.14
ZRC131	30	32	2	0.15
ZRC131	34	36	2	1.19
ZRC131	36	38	2	0.23
ZRC131	38	40	2	0.6
ZRC131	40	42	2	0.48
ZRC131	42	44	2	0.21
ZRC131	44	46	2	0.36
ZRC131	46	48	2	0.2
ZRC132	0	2	2	0.21
ZRC132	2	4	2	0.24
ZRC132	4	6	2	0.22
ZRC132	6	8	2	0.41
ZRC132	8	10	2	0.22
ZRC132	10	12	2	0.22
ZRC132	12	14	2	0.16
ZRC132	14	16	2	0.19
ZRC132	16	18	2	0.18
ZRC132	18	20	2	0.43
ZRC132	20	22	2	3.85
ZRC132	22	24	2	3.74
ZRC132	24	26	2	0.24
ZRC132	26	28	2	0.26
ZRC132	28	30	2	0.27

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

Hole_ID	From	To	Interval	Gold (g/t)
ZRC132	30	32	2	0.27
ZRC132	32	34	2	0.17
ZRC132	34	36	2	0.27
ZRC132	36	38	2	0.27
ZRC132	38	40	2	0.11
ZRC132	40	42	2	0.27
ZRC132	42	44	2	0.23
ZRC132	44	46	2	0.11
ZRC132	46	48	2	1.3
ZRC132	48	50	2	1.23
ZRC133	0	2	2	0.13
ZRC133	2	4	2	0.15
ZRC133	4	6	2	0.43
ZRC133	6	8	2	0.22
ZRC133	8	10	2	0.18
ZRC133	10	12	2	0.11
ZRC133	12	14	2	0.26
ZRC133	14	16	2	0.27
ZRC133	18	20	2	0.12
ZRC133	20	22	2	0.1
ZRC133	22	24	2	0.91
ZRC133	24	26	2	0.44
ZRC133	26	28	2	0.5
ZRC133	28	30	2	0.81
ZRC133	30	32	2	0.18
ZRC133	32	34	2	0.22
ZRC133	34	36	2	0.96
ZRC133	36	38	2	0.2
ZRC133	42	44	2	0.17
ZRC133	44	46	2	0.12
ZRC133	46	48	2	0.13
ZRC133	48	50	2	0.13
ZRC134	0	2	2	0.24
ZRC134	2	4	2	0.22
ZRC134	4	6	2	0.18
ZRC134	6	8	2	0.23
ZRC134	8	10	2	0.21
ZRC134	10	12	2	0.19
ZRC134	12	14	2	0.14
ZRC134	14	16	2	0.18
ZRC134	18	20	2	0.12
ZRC134	20	22	2	4.06

Hole_ID	From	To	Interval	Gold (g/t)
ZRC134	8	10	2	0.21
ZRC134	10	12	2	0.19
ZRC134	12	14	2	0.14
ZRC134	14	16	2	0.18
ZRC134	18	20	2	0.12
ZRC134	20	22	2	4.06
ZRC134	22	24	2	1.63
ZRC134	24	26	2	1.21
ZRC134	26	28	2	1.27
ZRC134	28	30	2	0.83
ZRC134	30	32	2	0.23
ZRC134	32	34	2	0.18
ZRC134	48	50	2	0.18
ZRC135	0	2	2	0.21
ZRC135	2	4	2	0.16
ZRC135	4	6	2	0.15
ZRC135	6	8	2	0.12
ZRC135	20	22	2	0.24
ZRC135	22	24	2	0.22
ZRC135	26	28	2	0.11
ZRC135	28	30	2	0.18
ZRC135	32	34	2	0.27
ZRC135	34	36	2	0.13
ZRC135	36	38	2	0.8
ZRC135	38	40	2	0.44
ZRC135	40	42	2	0.32
ZRC135	42	44	2	1.46
ZRC135	44	46	2	0.11
ZRC135	46	48	2	0.27
ZRC135	48	50	2	0.29
ZRC136	2	4	2	0.3
ZRC136	4	6	2	0.45
ZRC136	6	8	2	0.22
ZRC136	8	10	2	0.12
ZRC136	10	12	2	0.13
ZRC136	12	14	2	0.1
ZRC136	14	16	2	0.19
ZRC136	18	20	2	0.18
ZRC136	24	26	2	0.13
ZRC136	26	28	2	1.84
ZRC136	28	30	2	0.29
ZRC136	30	32	2	0.28

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

Hole_ID	From	To	Interval	Gold (g/t)
ZRC136	32	34	2	0.32
ZRC136	36	38	2	0.15
ZRC136	38	40	2	0.14
ZRC136	40	42	2	0.1
ZRC136	46	48	2	0.14
ZRC137	2	4	2	0.16
ZRC137	4	6	2	0.38
ZRC137	6	8	2	0.22
ZRC137	8	10	2	0.24
ZRC137	10	12	2	0.11
ZRC137	14	16	2	0.48
ZRC137	18	20	2	0.16
ZRC137	20	22	2	0.32
ZRC137	22	24	2	0.77
ZRC137	24	26	2	1.22
ZRC137	26	28	2	0.19
ZRC137	28	30	2	0.35
ZRC137	30	32	2	0.27
ZRC137	32	34	2	0.25
ZRC137	34	36	2	0.16
ZRC137	36	38	2	0.2
ZRC137	38	40	2	0.16
ZRC137	40	42	2	0.14
ZRC137	42	44	2	0.25
ZRC137	44	46	2	0.34
ZRC137	46	48	2	0.19
ZRC137	48	50	2	0.1
ZRC138	4	6	2	0.11
ZRC138	12	14	2	0.11
ZRC138	14	16	2	0.15
ZRC138	18	20	2	0.12
ZRC138	22	24	2	0.11
ZRC138	28	30	2	0.15
ZRC139	4	6	2	0.26
ZRC139	6	8	2	0.37
ZRC139	8	10	2	0.39
ZRC139	12	14	2	0.2
ZRC139	14	16	2	1.04
ZRC139	16	18	2	0.64
ZRC139	18	20	2	0.64
ZRC139	20	22	2	0.78
ZRC139	22	24	2	0.24

Hole_ID	From	To	Interval	Gold (g/t)
ZRC139	24	26	2	0.22
ZRC139	28	30	2	0.16
ZRC139	30	32	2	0.35
ZRC139	32	34	2	0.53
ZRC139	34	36	2	0.1
ZRC139	38	40	2	0.46
ZRC139	40	42	2	0.14
ZRC139	46	48	2	0.17
ZRC139	48	50	2	0.11
ZRC140	2	4	2	0.21
ZRC140	4	6	2	0.19
ZRC140	6	8	2	0.15
ZRC140	8	10	2	3.46
ZRC140	12	14	2	0.3
ZRC140	18	20	2	0.14
ZRC140	24	26	2	0.17
ZRC140	26	28	2	0.3
ZRC140	28	30	2	0.11
ZRC140	32	34	2	0.3
ZRC140	34	36	2	0.36
ZRC140	36	38	2	0.27
ZRC140	38	40	2	0.54
ZRC140	40	42	2	2.05
ZRC140	42	44	2	1
ZRC140	44	46	2	1.57
ZRC140	46	48	2	0.37
ZRC140	48	50	2	2.36
ZRC141	0	2	2	0.17
ZRC141	2	4	2	0.28
ZRC141	4	6	2	0.11
ZRC141	6	8	2	0.21
ZRC141	8	10	2	0.23
ZRC141	10	12	2	0.45
ZRC141	12	14	2	0.47
ZRC141	14	16	2	0.36
ZRC141	16	18	2	0.27
ZRC141	18	20	2	0.24
ZRC141	20	22	2	0.68
ZRC141	22	24	2	0.82
ZRC141	24	26	2	1.24
ZRC141	26	28	2	0.34
ZRC141	28	30	2	0.2

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

Hole_ID	From	To	Interval	Gold (g/t)
ZRC141	30	32	2	0.73
ZRC141	32	34	2	0.88
ZRC141	34	36	2	0.18
ZRC141	36	38	2	0.15
ZRC141	42	44	2	0.14
ZRC141	44	46	2	0.26
ZRC141	46	48	2	0.14
ZRC142	16	18	2	0.11
ZRC142	22	24	2	0.36
ZRC142	24	26	2	0.21
ZRC142	30	32	2	0.12
ZRC142	32	34	2	0.14
ZRC142	34	36	2	0.18
ZRC142	48	50	2	0.17
ZRC143	14	16	2	0.43
ZRC143	18	20	2	0.1
ZRC143	20	22	2	0.52
ZRC143	22	24	2	0.94
ZRC143	32	34	2	0.21
ZRC143	34	36	2	0.24
ZRC143	36	38	2	0.26
ZRC143	38	40	2	0.25
ZRC143	40	42	2	0.43
ZRC143	42	44	2	2.3
ZRC143	44	46	2	0.45
ZRC143	46	48	2	0.95
ZRC143	48	50	2	0.52
ZRC085	*0*	*2*	*2*	*0.17*
ZRC085	*2*	*4*	*2*	*0.13*
ZRC085	*18*	*20*	*2*	*0.11*
ZRC085	*20*	*22*	*2*	*0.74*
ZRC085	*24*	*26*	*2*	*0.51*
ZRC085	*26*	*28*	*2*	*0.32*
ZRC085	*28*	*30*	*2*	*0.47*
ZRC085	*30*	*32*	*2*	*0.45*
ZRC085	*32*	*34*	*2*	*0.94*
ZRC085	*34*	*36*	*2*	*1.33*
ZRC085	*36*	*38*	*2*	*1.23*
ZRC085	*38*	*40*	*2*	*0.52*
ZRC085	*40*	*42*	*2*	*0.46*

Hole_ID	From	To	Interval	Gold (g/t)
ZRC085	*42*	*44*	*2*	*4.39*
ZRC085	*44*	*46*	*2*	*14.8*
ZRC085	*46*	*48*	*2*	*1.36*
ZRC085	*48*	*50*	*2*	*0.69*
ZRC085	*52*	*54*	*2*	*0.12*
ZRC085	*54*	*56*	*2*	*0.28*
ZRC085	*56*	*58*	*2*	*0.33*
ZRC085	*60*	*62*	*2*	*0.13*
ZRC085	*62*	*64*	*2*	*0.22*
ZRC085	*80*	*82*	*2*	*0.11*
ZRC085	*82*	*84*	*2*	*0.11*
ZRC085	*84*	*86*	*2*	*0.18*
ZRC085	*86*	*88*	*2*	*0.8*
ZRC085	*88*	*90*	*2*	*2.04*
ZRC085	*90*	*91*	*1*	*1.01*
ZRC086	*1*	*2*	*1*	*0.46*
ZRC086	*2*	*4*	*2*	*0.3*
ZRC086	*4*	*6*	*2*	*0.18*
ZRC086	*6*	*8*	*2*	*0.1*
ZRC086	*16*	*18*	*2*	*0.24*
ZRC086	*18*	*20*	*2*	*0.41*
ZRC086	*20*	*22*	*2*	*0.24*
ZRC086	*26*	*28*	*2*	*0.2*
ZRC086	*28*	*30*	*2*	*0.35*
ZRC086	*30*	*32*	*2*	*1.08*
ZRC086	*32*	*34*	*2*	*0.46*
ZRC086	*34*	*36*	*2*	*0.19*
ZRC086	*36*	*38*	*2*	*0.34*
ZRC086	*38*	*40*	*2*	*0.81*
ZRC086	*40*	*42*	*2*	*10.65*
ZRC086	*42*	*44*	*2*	*0.36*
ZRC086	*44*	*46*	*2*	*0.92*
ZRC086	*50*	*52*	*2*	*0.15*
ZRC086	*52*	*54*	*2*	*0.14*
ZRC086	*60*	*62*	*2*	*0.19*
ZRC086	*62*	*64*	*2*	*0.14*
ZRC086	*66*	*68*	*2*	*0.25*
ZRC086	*74*	*76*	*2*	*0.35*
ZRC086	*76*	*78*	*2*	*0.11*

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

JORC Code, 2012 Edition – Table1, Section 1-2

Section 1: Sampling Techniques and Data		
Criteria	**JORC Code explanation**	**Commentary**
Sampling techniques	• *Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.* • *Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.* • *Aspects of the determination of mineralisation that are Material to the Public Report.* • *In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.*	• The Abujar 2018 drilling has been carried out with a multiple purpose drill rig using Reverse Circulation (RC) techniques for collar of each hole and Diamond Drilling (DD) techniques for the tail of some deep hole. In general, the RC to DD switch point is at around 120-150m hole depth. Holes are angled to optimally intersect mineralised zones. All RC and DD samples were weighed to determine recoveries. All potentially mineralised zones were then split and sampled at 1m intervals using three-tier riffle splitters. DD core were cut at the camp site of the Abujar project. QA/QC procedures were completed as per industry best practice standards (certified blanks and standards and duplicate sampling). In general, 2m RC composite samples and 1m DD half core were despatched to ALS Lab in Yamoussoukro for sample preparation, where they were crushed, dried and pulverised to produce a sub pulps for fire assay. The pulps were then sent to ALS's assay Lab in Ouagadougou (Burkina Faso) or Kumasi (Ghana) where 50g fire assays, AAS finishes and screen fire assays have been conducted.
Drilling techniques	• *Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type,*	• Reverse Circulation "RC" drilling within the exploration area comprises 5 1/8 inch diameter face sampling hammer and hole depths range from 13m to 150m.

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

	whether core is oriented and if so, by what method, etc).	• Diamond drilling within the exploration area comprises NQ sized core. • The RC to DD switch point is at around 120-150m hole depth.
Drill sample recovery	• *Method of recording and assessing core and chip sample recoveries and results assessed.* • *Measures taken to maximise sample recovery and ensure representative nature of the samples.* • *Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.*	• Diamond core was reconstructed into continuous runs for orientation; marking depths were checked against the depths marked on core blocks. RC recoveries are logged and recorded in the database. Overall recoveries are >75% for the RC; there are no significant sample recovery problems. A technician is always present at the rig to monitor and record recovery. A cyclone and splitter were used to provide a uniform sample and were routinely cleaned. Tietto employees managed sampling to ensure correct sampling practices. RC samples were visually checked for recovery, moisture and contamination. A booster was used when drilling wet holes, to maintain dry samples each wet hole was purged after a rod change and before the commencement of drilling the next rod. Core recoveries were generally good with 90% average recovery. As the mineralised zone is generally silicified and competent, core loss was not observed to be an issue over the mineralised zones. No significant bias is expected and any potential bias is not considered material.
Logging	• *Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.*	• Tietto uses specifically designed log sheets to capture all geological data. During logging, part of the RC sample is washed, logged and placed (using glue) to chip boards meter by meter, which are stored on site. Geotechnical logging was

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

	• *Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.* • *The total length and percentage of the relevant intersections logged.*	carried out on all diamond drill holes for recovery, RQD and number of defects (per interval). Information on structure type, dip, dip direction, alpha angle, beta angle, texture, shape, roughness and fill material is stored in the structure/Geotech table of the database. Logging of diamond core and RC samples recorded lithology, mineralogy, mineralisation, structural (DDH only), weathering, alteration, colour and other features of the samples. Core was photographed in both dry and wet form. All drilling has been logged to a standard that is appropriate for inclusion in any future Mineral Resource estimation or mining studies and metallurgical studies.
Sub-sampling techniques and sample preparation	• *If core, whether cut or sawn and whether quarter, half or all core taken.* • *If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.* • *For all sample types, the nature, quality and appropriateness of the sample preparation technique.* • *Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.* • *Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.* • *Whether sample sizes are appropriate to the grain size of the material being sampled.*	• Diamond core sampling intervals were based on lithological or alteration boundary contacts, with a minimum down hole length of 0.53m and maximum of 1.50m. The core was photographed, structurally logged, cut and half core was sent for assay. Sampling of RC holes was completed on 1-metre downhole intervals, but 2-metre composite samples were created and assayed; bulk samples were taken from the cyclone meter by meter by Tietto field assistants and split through a three-tier Jones riffle splitter to collect 2 6.5kg samples. Every attempt was made to ensure that the splitter that was used was in good condition, level and that the splitter was cleaned with compressed air after each sample was passed through it to minimise contamination. Every effort was made to ensure that

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

		samples were sampled dry. Field QAQC procedures included the insertion of field duplicates and commercial standards. Field duplicates were inserted at 15m intervals or where mineralisation was anticipated and Standards were inserted at 30m intervals (every 15 RC samples for 2 meter composite RC samples). Approximately 1:15 RC field duplicates were taken from 1m riffle split samples at the rig. Sample sizes are considered to be appropriate to accurately represent the gold mineralisation at Abujar based on the intersections, the sampling methodologies, observed gold particle size and assay values.
Quality of assay data and laboratory tests	• *The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.* • *For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.* • *Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.*	• Assaying was completed at ACTLABS laboratories either in Ouagadougou or Kumasi depending on LAS lab's working loads using 50g fire assay and an atomic absorption spectrometer (AAS) finish which is considered a near total assaying technique if completed properly. This method is appropriate and returns accurate and precise values for gold. Field QAQC procedures included the insertion of field duplicates and commercial standards. The laboratory inserted feldspar flushes, standards, repeats and duplicates. Repeat or duplicate analysis for samples (assayed in the past three years) showed that the precision of samples is within acceptable limits.
Verification of sampling and assaying	• *The verification of significant intersections by either independent or alternative company personnel.* • *The use of twinned holes.*	• Several independent personnel visually verified intersections in diamond core and RC chips as well as trenches and outcrops. Primary data was collected using

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

	• *Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.* • *Discuss any adjustment to assay data.*	a set of company standard Excel templates on Toughbook laptop computers using lookup codes. The geo-information was validated on-site by the Company's database technicians and then validated and merged into a final database by the company's database manager. There has not been any adjustment to assay data in the past. Assay data for the 2018 drilling is yet to receive.
Location of data points	• *Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.* • *Specification of the grid system used.* • *Quality and adequacy of topographic control.*	• Drill hole collar locations as reported have been picked-up using a Garmin GPS. Final locations will come from a pickup by a surveyor using a total station. Downhole surveying was completed by the drilling contractor using a Reflex EZ-shot Downhole Survey instrument. All drill holes have been located using UTM grid WGS84 Z31N.
Data spacing and distribution	• *Data spacing for reporting of Exploration Results.* • *Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.* • *Whether sample compositing has been applied.*	• Further drilling is required to test zones of gold anomalism. Drill fences are spaced on 100m centres along strike and 40-50m along dip. There appears to be good geological and grade continuity between sections however further drilling is required to enable support for the definition of Mineral Resource and Reserves, and the classifications applied under the 2012 JORC Code. There has been no compositing of samples with samples reported as a weighted average across zones of mineralisation.
Orientation of data in relation to geological structure	• *Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.*	• Drill sections are approximately orientated West to East with respect to grid North. This orientation allows for the delineation of North-South structures internal to the shear zone as well as the overall NS

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

	• *If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.*	trend. Holes are drilled at -65° to -50°
Sample security	• *The measures taken to ensure sample security.*	• Chain of custody is managed by Tietto until the samples were despatched to ALS Lab in Yamoussoukro. Samples are stored on site and delivered by Tietto personnel to ALS Lab in Yamoussoukro for sample preparation. Whilst in storage, they remain under guard in a locked yard. Tracking sheets are used to track the progress of batches of samples.
Audits or reviews	• *The results of any audits or reviews of sampling techniques and data.*	• Tietto personnel and consultants working on the Abujar project site conducted data reviews as their routine work. No material issues have been noted.

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

Section 2: Reporting of Exploration Results		
Criteria	**JORC Code explanation**	**Commentary**
Mineral tenement and land tenure status	• *Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.* • *The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.*	• The Abujar Project hosts three exploration licences, the Abujar South Exploration License ("Issia Licence", 390.5 $km^{2,}$, to which Tietto holds a 100% interest), the Abujar Middle Exploration License ("Zoukougbeu Licence", 383.5 km^2, to which Tietto holds a 50% interest through the licence holding company B&F Minerals Sarl, with the right to acquire a further 40% interest) and the Abujar North Exploration License ("Zahibo Licence", 340 km^2, to which Tietto holds a 15% interest through the licence holding company Gail Exploration Sarl, with the right to acquire a further 65% interest), which together, cover an area of 1,114 km^2. • The Issia Licence was granted on 22 March 2017. The Zoukougbeu Licence was granted on 15 September 2014. The Zahibo Licence was granted on 6 May 2015 • All exploration licences have an initial tenure of 4 years with two entitled extension of 3 years each plus a special extension of 2 years, for a total of up to 12 year tenure. • All licences are granted for gold. All fees have been paid, and the permits are valid. • The ownership of mineral lease rights in Côte d'Ivoire is governed primarily by the Law n°2014-138 dated on March 24 2014 (**Côte d'Ivoire Mining Code**). If the exploration licences were to be subsequently converted into Mining Licences, the

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

		Government of Cote d'Ivoire would hold a 10% share of the permit and Tietto would hold 90%, 85% and 80% for the Abujar South, Abujar Middle and Abujar North, respectively.
Exploration done by other parties	• *Acknowledgment and appraisal of exploration by other parties.*	• There was no historical exploration activities on any of the three licences comprising the Abujar prject. • Tietto started systematic exploration as soon as the licences were granted on each of the three licenced areas.
Geology	• *Deposit type, geological setting and style of mineralisation.*	• The Abujar Project is located within the Proterozoic Birimian rocks of the Man shield, as situated on the Daloa 1:200,000 geologic sheet, 30km west of city of Daloa, It is located in the Hana-Lobo belt, east of the Sassandra fault that marks the boundary between the Man shield (Archean) and Eburnean domain. The regional trend is north-northeast to northeast. Formations which have been structured by the Eburnean cycle are Birimian. 17 volcano sedimentary belts have been recorded in this domain, and reported to hold 95% of the gold mineralisation in the country. • Within the Project, outcrops are very uncommon, only laterite cover is mainly spread with hardpans and duricrust spots occurring. The Abujar Deposit is located in NNE SSW orientated body of granitoid migmatite and is hosted within in an interpreted regional shear structure. This is enclosed in two mica granite bodies of similar

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

		interpreted orientation which are regionally referred to as granodiorites.

Drill hole Information	• *A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:*
	  ○ *easting and northing of the drill hole collar*
	  ○ *elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar*
	  ○ *dip and azimuth of the hole*
	  ○ *down hole length and interception depth*
	  ○ *hole length.*
	• *If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.*
		• The drill hole information is presented in the Table 1 and Table 2 above.

Data aggregation methods	• *In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.* • *Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.* • *The assumptions used for any reporting of metal equivalent values should be clearly stated.*	• The visible gold reported in this announcement is based purely on the Company's technical personnel's visual observation of the DD core.

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

Relationship between mineralisation widths and intercept lengths	• *These relationships are particularly important in the reporting of Exploration Results.* • *If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.* • *If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').*	• Drill hole angles of ~60 on varying azimuths are adequate for the mineralisation intercepted. All exploration drilling results to date have been reported as down hole lengths.
Diagrams	• *Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.*	• Refer to diagrams in text
Balanced reporting	• *Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.*	• All grades, high and low, are reported accurately with "from" and "to" depths and "hole identification" shown.
Other substantive exploration data	• *Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.*	• The project delivered in late 2016 a JORC2012 Inferred resource of 10.42mt at 2.1g/t containing 703,600oz gold. • Preliminary metallurgical study was also carried out at ALS Perth in 2015. • Details about the above report are available within the Company. • No work has been carried out on geotechnical, hydrogeological or environmental issues etc.
Further work	• *The nature and scale of planned further work (eg tests for lateral*	• Further infill and extensional drilling is planned and is in the process of being executed.

Tietto Minerals Ltd
Level 3, 88 William Street
Perth, WA 6000
Tel: +61 8 9331 6710
Fax: +61 8 6316 1428
Web: www.tietto.com

	extensions or depth extensions or large-scale step-out drilling). • *Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.*	• Extensive geophysical study of the project area is planned to be carried out in the 2nd quarter of 2018.